



Dewatering Submersible Pump EOC Series

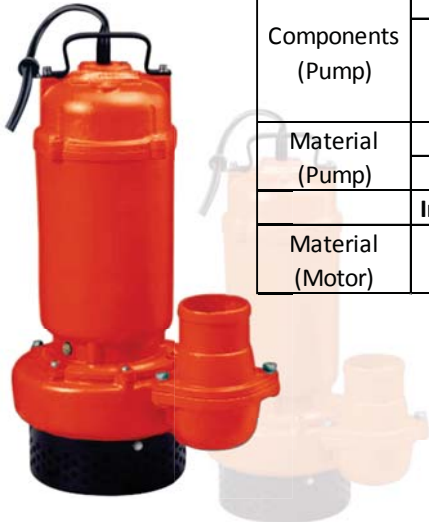


Model		EOC1500S-80	EOC1500T-80	EOC1500S-50	EOC1500T-50
Components (Pump)	Impeller	Semi-open	Semi-open	Semi-open	Semi-open
	Shaft seal	Double mechanical seal	Double mechanical seal	Double mechanical seal	Double mechanical seal
Material (Pump)	Impeller	Cast Iron	Cast Iron	Cast Iron	Cast Iron
	Casing	Cast Iron	Cast Iron	Aluminum	Aluminum
	Insulation Class	B	B	B	B
Material (Motor)	Shaft	Stainless Steel #45	Stainless Steel #45	Stainless Steel #45	Stainless Steel #45

DIMENSIONS

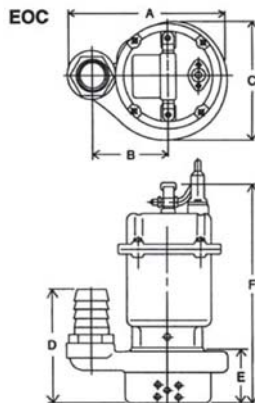

EOC PERFORMANCE CURVES

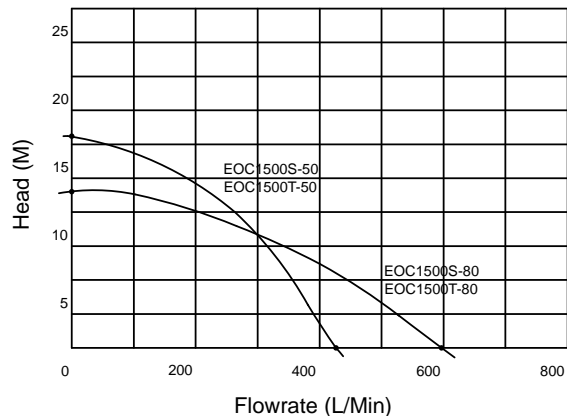

SPECIFICATIONS

TYPE	Power	Phase	Volt	Disch Dia	Max Head	Max Flow	Cable	Weight	A	B	C	D	E	F
	kW (HP)	PH	V	inch (mm)	M	L/MIN	mm ³ X M	KG	mm	mm	mm	mm	mm	mm
EOC-1500S-50	1.5 (2)	1	230	2" (50)	14	430	1.5 X 10	21	270	130	170	120	490	170
EOC-1500T-50		3	415				1.5 X 10	28.5						
EOC-1500S-80		1	230	3" (80)	18	600	1.5 X 10	29	350	160	200	120	490	170
EOC-1500T-80		3	415				1.5 X 10	22						

