

# FUJICO


## DEWATERING PUMP **FS**

The large channel in the spiral casing allows the high sand and slit content water to pass through easily.  
 The shaft-mounted agitator prevents the "air lock" that tends to take place on vortex pumps.  
 The pump section can be disassembled and reassembled using a single 13-mm box wrench.



### Application

- Civil engineering, building sites, basements or utility pits, draining storm water, groundwater or puddles

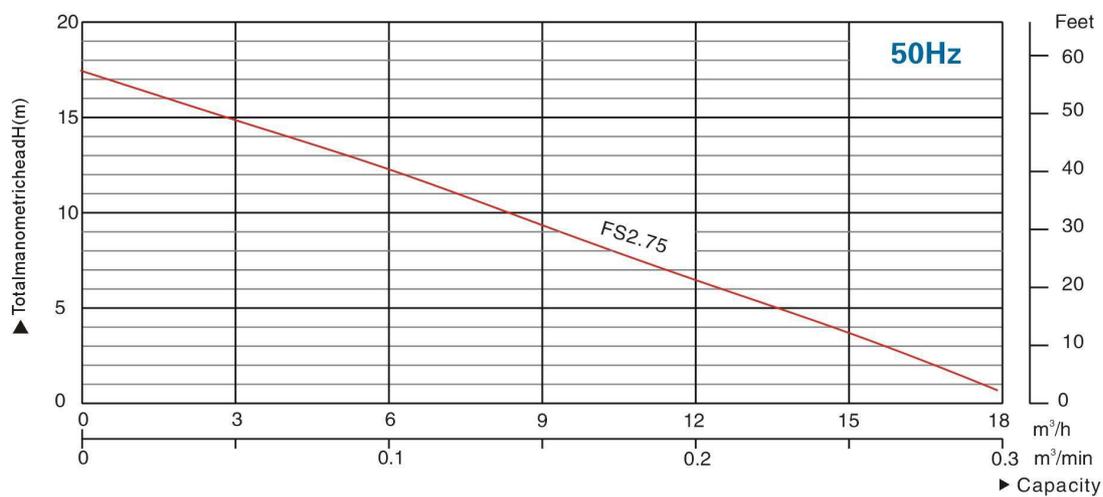

### Standard specifications 50Hz

Model	Outlet mm	Motor Power Kw	Phase	Starting Method	Cable Length m	Impeller passage mm	G. w kg	Dimensions (mm)
FS2.75	50	0.75	Single	Capacitor Run	8	7	7.4	390 × 285 × 184